

SUMMIT SERIES

Industrial Wireless Radio Remote Control System



SK1500/2500

Features & Benefits

- Puts operator in total control of equipment from the plant floor
- 1- or 2-speed, 5-motion
- Red Mushroom pushbutton (mainline contactor control)
- Range: Up to 1000 feet maximum power (8 power settings available)
- Remote Pairing Function (Match TX to RX in field)
- Manual Channel Scan (Manually search for best available channel for transmission)
- TX Power Consumption = 28mA
- Power Indicator on RX for troubleshooting ease
- Start up/Shut down alarm (No external alarm needed)
- Receiver & transmitter enclosure: IP65 glass reinforced nylon
- Pre-wired receiver for quick and easy installation
- Operation Frequency: 430 - 435 MHz unlicensed
- 25KHz Channel Spacing

Safety

The wireless technology incorporates the latest advancements in RF and microprocessor design. Such features as watchdog error circuitry, output relay monitoring, FDDI (Frequency Deviation Deflection Indicator), and programmable password protection* all insure safe wireless operation of your equipment. Most of all, wireless technology removes the operator from harm's way. The operator can choose the safest and most convenient operation position. * Factory programming required

Reliability

All products are backed by Control Chief's years of experience in the material handling market. Our team of qualified engineers are ready to provide you prompt professional service whenever and wherever you need it. This commitment to reliability is backed by a 1-year warranty, the best in the industry.



**CONTROL
CHIEF**



WIRELESS SOLUTIONS

Contact Your Control Chief Dealer for More Information at:
(800) 792-7427 or email info@GulfAtlanticEquipment.com

**Gulf
Atlantic**

SUMMIT SERIES

Technical Specifications

Overall Specifications

- 70 Operating channels
- Over one million sets of ID codes
- Channel space = 25 KHz
- Hamming distance ≥ 4
- Enhanced glass-fiber structure
- Operating environment $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- Operating distance up to 300 M

Transmitter Specifications


- Runs on 4 standard AA alkaline batteries
- Emission Power < 10mW
- Weight = 385 g (K3/K4)
- 3.17" x 2.37" x 10.91" (L x W x H)*

Receiver Specifications

- Multiple supply voltages: Available in AC or DC power
- Weight = 2900 g (K3/K4) w/ cable
- 6.67" x 4.4" x 10.8" (L x W x H)*

* Dimensional drawings available upon request.

Receiver Wiring Diagram

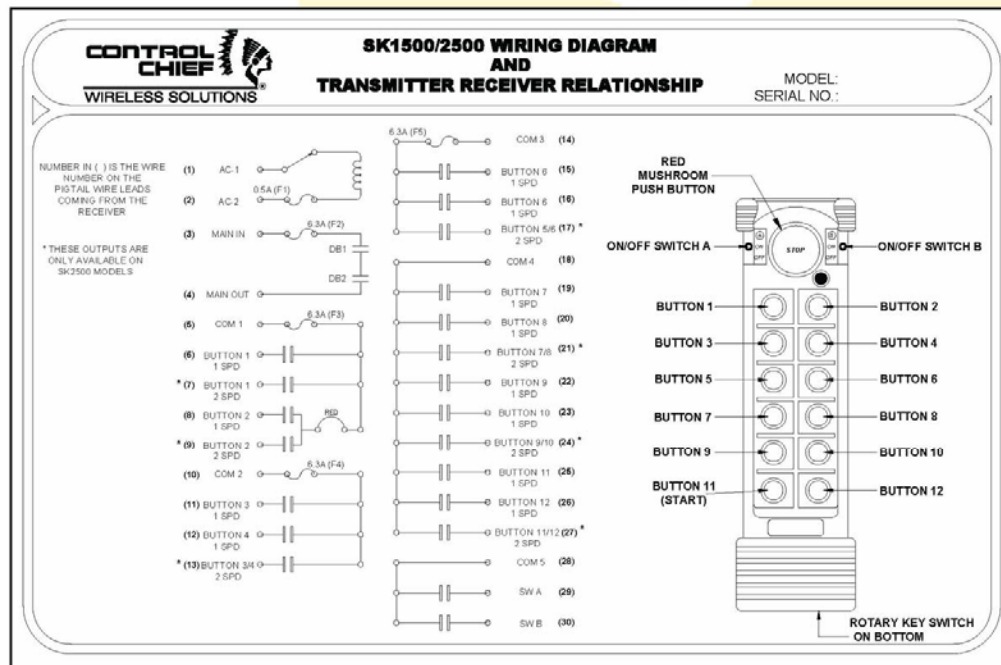

Wiring diagrams for reference only - not for installation



INDUSTRIAL EQUIPMENT INCORPORATED
Concrete, Aggregate, and Material Handling Equipment

Concrete Solutions with Rock Solid Results

P. O. Box 2169, Crystal River, FL 34423

(800)-792-7427

352-628-6774 (Fax)

www.GulfAtlanticEquipment.com

info@GulfAtlanticEquipment.com