


# BINMASTER

*Taking Control...To A Higher Level*



## CompactPro

**Compact Capacitance  
Probe For Reliable  
Level Measurement and Plug  
Chute Detection in Liquid,  
Powder, Granular, and  
Pelletized Materials**

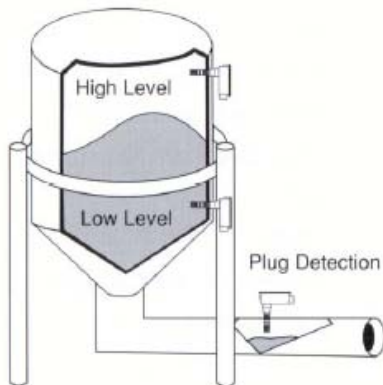

- Works Where Proximity Switches Don't
- For Tanks, Bins, Silos, Chutes, Conveyors, Pipes, and Load Out Hoppers
- ProShield Feature Ignores Material Buildup
- LED on Housing Indicates Sensor Status
- Easy "One-Time" Calibration
- Compact Design; Simple To Install
- For Metal, Plastic or Other Non-Metallic Vessels

**For More Information or A Quotation  
Contact Your BinMaster Dealer:**

**Gulf Atlantic**

INDUSTRIAL EQUIPMENT INCORPORATED  
Concrete, Aggregate, and Material Handling Equipment


Concrete Solutions with Rock Solid Results

**800-792-7427**


(800) 792-7427 or (352) 628-6674

## Eliminate Proximity Switch Failures with Reliable CompactPro Technology

Introducing BinMaster's **CompactPro**: a compact capacitance probe for use in solid, liquid and slurry applications. **CompactPro** provides reliable point level measurement in materials where proximity switches don't work. Special ProShield technology ignores the material build-up that causes proximity switches to fail. For use in metal, plastic or other non-metallic tanks and vessels. **CompactPro** is simple to install and features easy "one-time" calibration. Economically priced, **CompactPro** offers the same features found in more expensive capacitance probe sensors.

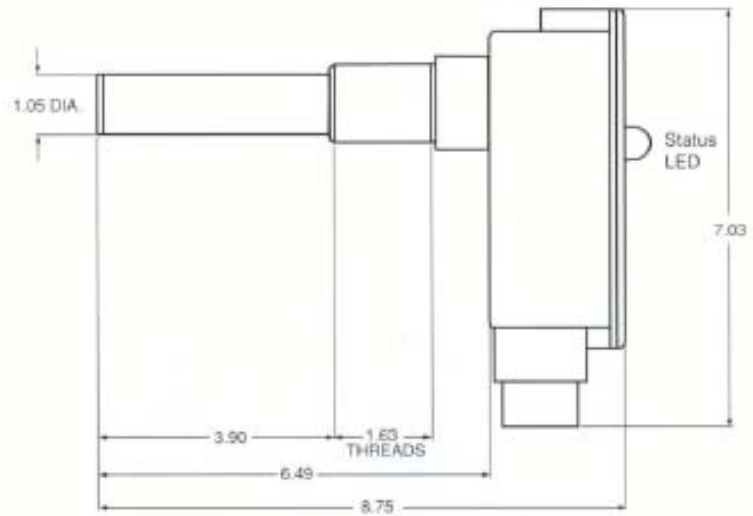

Wiring Diagram



## CompactPro Features

- ProShield® technology ignores material build-up on the vessel sidewall or along the probe assembly for more reliable operation.
- Specifically designed electronics provide highly sensitive measurement detection (requires less than a 1 picofarad shift from ambient).
- Visual LED on housing indicates sensor status.
- Simple "one-time" calibration procedure.
- Operation is not affected by changes in temperature—eliminates the need for bothersome re-calibration.
- Four levels of static discharge protection—important for pneumatically conveyed materials.
- 1 - 30 second time delay.
- Simple to install; no routine maintenance.
- 5 Amp, SPDT fail- safe relay output (switch selectable high/low fail safe).
- Operation is independent of bin wall, for use in metal or non-metallic vessels.

## Specifications

Power Requirements:	120 VAC 1.5 VA
Output Relay:	SPDT 5 amp at 250 VAC
Temperature Electronics:	-40 to 185° F (-40 to 85° C)
Probe:	-40 to 240° F (-40 to 116° C)
Enclosure:	NEMA 4X, Dust Tight, Water Resistant
Sensitivity Setting:	Adjustable sensitivity to <1 Picofarad
Calibration:	Multi-turn Potentiometer
Fail-Safe:	Switch Selectable, High/Low
Time Delay:	Adjustable 1 to 30 Seconds
Enclosure:	PVC
Probe:	CPVC
Mounting:	1" NPS (1/4" NPT Adapter available)
LED:	Indicates Material Presence or Absence

[www.GulfAtlanticEquipment.com](http://www.GulfAtlanticEquipment.com)

**BINMASTER**

**Gulf Atlantic**

INDUSTRIAL EQUIPMENT INCORPORATED  
Concrete, Aggregate, and Material Handling Equipment

Concrete Solutions with Rock Solid Results

**800-792-7427**

Contact Your  
Dealer