

# UNIVERSAL NEW HOLLAND IMPACT CRUSHER (PRIMARY)



The Universal Primary New Holland Impact Crusher's unique "free-flow" design combines superior engineering with top quality, rugged construction. This crusher combines a large expansion crushing chamber, a massive fabricated rotor, upper deflector screen grate with vertical openings, upper and lower breaker bars; all adding up to precise product control with maximum output. The feed opening is equipped with a protective chain and rubber curtain to protect personnel and ancillary equipment. The Universal Primary Impact Crusher is the most versatile primary crusher available.

### **Benefits:**

- High ratio of reduction
- Low percentage of flats and elongated particles
- More control over finished product size
- Fast flow of material through crusher
- Top quality cubical aggregate

### **Standard Design Features:**

- Main housing, fabricated plate steel construction.
- Breaking chamber, lined with replaceable highly abrasive resistant alloy steel.
- Feed chute, hood with chain and rubber curtain.
- Hydraulic feed plate.
- Rotor, fabricated steel with manganese steel hammers.
- Heat treated heavy-duty shaft mounted on spherical roller bearings.
- Wear bar, positive adjustment release device with replaceable manganese steel head. (Except Model 74125.)
- Deflector screen grate, abrasion and impact resistant steel.
- Lower impact plate positive adjustment, release device/abrasion and impact resistant steel.



.....

### **Optional Equipment Available:**

- Crusher sheave
- Motor sheave
- V-belts
- Drive guard
- Electric motor
- Jib crane

**CONTACT YOUR UNIVERSAL ENGINEERING DEALER TODAY:**

**INDUSTRIAL EQUIPMENT INCORPORATED**  
Concrete, Aggregate, and Material Handling Equipment  
*Concrete Solutions with Rock Solid Results*  
**800-792-7427**

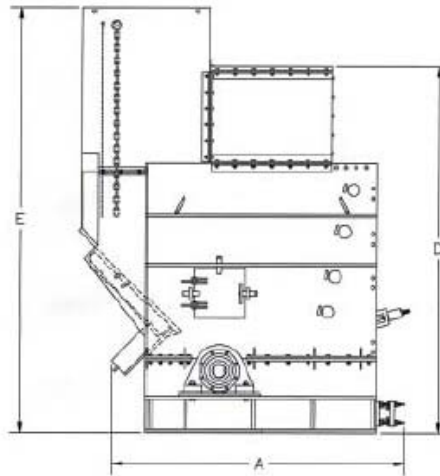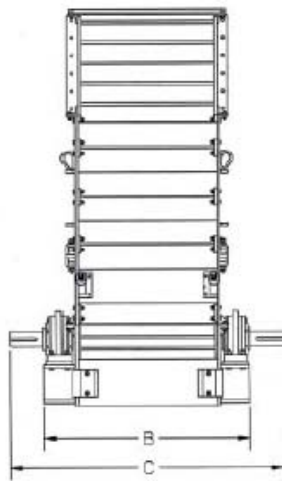

### DIMENSIONS

IMPACT MODEL		3755	4555	5165	6185	74125
A = Length at Base (with lower grate adj. mech)	in	111.31	111.31	129.56	144.00	305.00
	mm	2,827.29	2,827.29	3,290.84	3,657.61	7,747.03
B = Width at Housing (with bearings)	in	60.00	72.50	71.75	93.00	120.00
	mm	1,524.01	1,841.51	1,822.46	2,362.21	3,048.01
C = Width at Shaft	in	87.75	100.00	100.00	124.00	163.00
	mm	2,228.86	2,540.01	2,540.01	3,149.61	4,140.22
D = Height - Less Hood and Chain Curtain	in	104.00	104.00	159.25	180.00	265.75
	mm	2,641.61	2,641.61	4,044.97	4,572.02	6,750.08
E = Height - With Hood & Chain Curtain	in	131.00	150.00	182.75	209.00	277.00
	mm	3,327.41	3,810.02	4,641.87	5,308.62	7,035.83

### SPECIFICATIONS

Feed Opening		in	37 x 55	45 x 55	51 x 65	61 x 65	74 x 125
		mm	940 x 1,400	1,145 x 1,400	1,295 x 1,650	1,550 x 2,195	1,880 x 3,175
Maximum Feed Size		in	34	42	48	58	71
		mm	865	1,065	1,220	1,475	1,800
Rated Capacity*		STPH	400**	500**	750***	1,400***	2,000***
		MTPH	360**	450**	670***	1,250***	1,785***
Discharge Opening		in	38.25 x 73.25	46.25 x 73.25	53.25 x 87.13	63.25 x 103.75	78 x 158
		mm	972 x 1,861	1,175 x 1,861	1,353 x 2,213	1,607 x 2,635	1,981 x 4,013
Rotor Size (Diameter x Width)		in	43.5 x 36	43.5 x 44	46 x 50	51.75 x 60	72 x 72
		mm	1,105 x 915	1,105 x 1,120	1,170 x 1,270	1,315 x 1,525	1,830 x 1,830
Crusher Weight*		lb.	29,000	41,000	68,000	87,000	200,000
		kg	13,155	18,600	30,845	39,465	90,720
Rotor Speed		RPM	450 - 900	450 - 900	400 - 850	400 - 600	250 - 450
Horsepower		HP	250	350	450	600	1,000
Standard Hammers:	Weight	lb(kg)	556(252)	687(312)	800(363)	1,000(454)	2,170(984)
	Rows		3 x 1	3 x 1	3 x 1	3 x 1	3 x 1
	Material		Manganese	Manganese	Manganese	Manganese	Manganese
Side Liners Thickness		in	0.75	0.75	1.75	1.75	2.00
		mm	19.05	19.05	44.45	44.45	50.80

\* Rated capacity is established with new or well maintained hammers. Capacity will be less with worn wear parts.

\*\* Of minus 3" (76mm) product.

\*\*\* Of minus 6" (152mm) product.

**CONTACT YOUR DEALER TODAY**

**Gulf  
Atlantic**

INDUSTRIAL EQUIPMENT INCORPORATED  
Concrete, Aggregate, and Material Handling Equipment

Concrete Solutions with Rock Solid Results

**800-792-7427**

The information contained herein is general in nature and is not intended for specific construction, installation or application purposes. Predictions of actual performance of a given piece of equipment should take into account the many variable field factors, no warranty of any kind, expressed or implied, is extended by presenting the generalized data herein. We reserve the right to make changes in specifications shown herein or add improvements at any time without notice or obligation.